MiBOXER® | Mi·Light Subordinate New Brand

9W RGB+CCT LED Bulb

Model No.: FUT012

Features

- RGB+CCT
  16 Millions of colors to choose
- Color temperature
  2700K~6500K
- Dimmable
  Saturation control
- 2.4G RF wireless transmission technology
- Signal transmitting & Modes synchronization
- Remote control
  Control distance 30m
- Smartphone APP control
  (2.4GHz gateway is needed)
- Support third party voice control
  (2.4GHz gateway is needed)
- DMX512 controllable
  (DMX512 transmitter is needed)

Parameters

Model No.: FUT012
Power: 9W
Voltage: AC100~240V
Frequency: 50/60Hz
Color Temp.: 2700K~6500K
Light Efficiency: 95 LM/W
Luminous Flux: 850LM

CRI: >80
PF: >0.5
Lifespan: 50000h
Beam Angle: 220°
RF: 2.4GHz
Control Distance: 30m

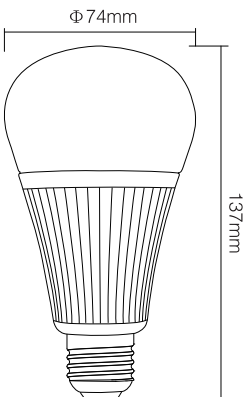

Link/Unlink

Compatible with these remote controls (Purchased separately)

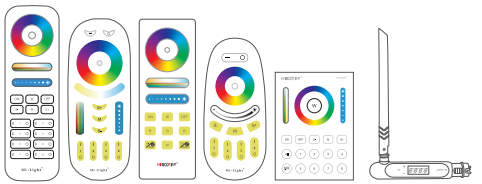

FUT089 FUT092 FUT088 FUT096 B8 FUTD01



B4 / T4 B3 / T3 B0 WL-Box1

NOTE:

LED bulb can be working after linking with remote controller or DMX512 transmitter; for more details, please read the remote controller or DMX512 transmitter instruction.

DMX512 LED Transmitter Link/Unlink

Compatible with DMX512 LED Transmitter (**Purchased separately**)

❶ Choose the zone for the controller by pressing ' + ' or ' - ' (e.g. 'CH12' means zone 12)







Link Switch off the bulb, after 10 seconds switch on again

When the bulb pilot lamp is on, short press " SET " **3 times** within 3 seconds

The bulb blink slowly 3 times, means the linking is done successfully

Unlink Switch off the bulb, after 10 seconds switch on again

When the bulb pilot lamp is on, short press " SET " **5 times** within 3 seconds

The bulb blink quickly 10 times, means the unlinking is done successfully

⚠ If the link or unlink failed, please follow the above steps again.

DMX512 LED Transmitter Connection Diagram

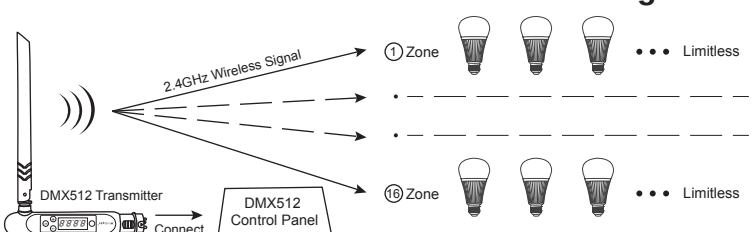

Dynamic Mode Sheet

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Mardi Gras	Adjustable
2	Automatic color change	
3	Sam	
4	Gemstone	
5	Twilight	
6	American	
7	Fat Tuesday	
8	Party	
9	Slow Color Splash	

Signal transmitting

One bulb can transmit the signals from the remote control to another bulb within 30m, as long as there is a bulb within 30m, the remote control distance can be limitless.

Modes synchronization

Different bulb can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

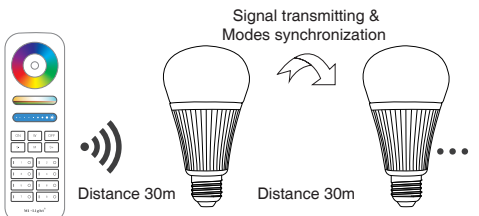

Attention

1. Make sure the voltage is between AC100~240V.
2. When install the light, pls switch off the power to make sure the safty.
3. The working power is high voltage alternating current, so it must be far away from people and must with ground connection.
4. Avoid using under high temperature or moisture.

Made in China