Installation Instructions
Photometry

Dorit Ø140mm

TC-0349-BLA

Downlight IP44 Dorit Ø140mm LED 14W 3000K Blanco 1149lm



TECHNICAL FEATURES

IP44

Total power consumption of light (W) : 15.7W

Real lumens : 1149

Nominal lumens : 0

Real lm/W : 73

Correlated Colour Temperature (CCT) : LED warm-white 3000K

Lens / reflector angle : FLOOD 66º

UGR : <=19

Structure material : Aluminium

Structure finish : White

Diffuser material : Glass

Diffuser finish : Transparent

Voltage / frequency : 100-240V/50-60Hz

Dimming protocol : ON-OFF

Power Factor : 0.90

Useful life : 36.000h L70B30

Warranty : 5 Years

Easily recycled luminaire

LUMINOTECHNIC FEATURES

Luminance C0ºG65º: 1932

Luminance C90ºG65º: 1926

UGR

UGR crosswise: 18.0

UGR lengthwise: 18.0

Lampholder	Quantity	Light source power (W)
LED	1	14W

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	18.0
UGR lengthwise	18.0





LOGISTICS

Net weight (kg): 0.53

Packaged weight (kg): 0.66

Packaging: 155mm x 155mm x 115mm

18 Un
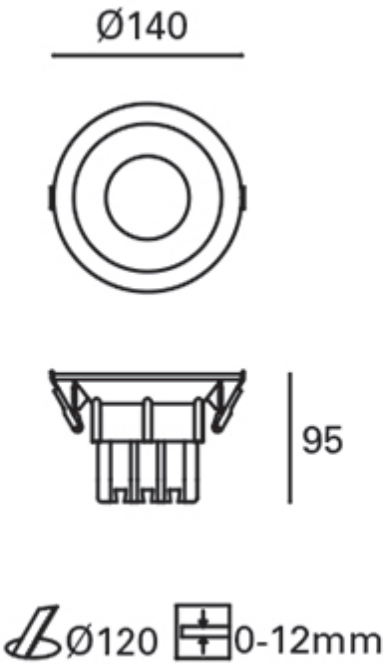
LIGHT APPLICATION